



50mm PVC Faux Wood Blind



Cord consolidator x 1
fixed on blind already

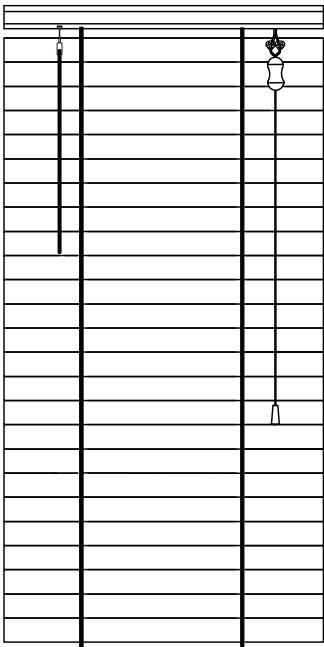

Components included					
Picture	Des	60cm	90cm	120cm	150~180cm
	Bracket [01]	2	2	2	2
	Center Support [02]	0	1	2	2
	Cleat [03]	1	1	1	1
	Valance Clip [04]	2	3	3	4
	Hold down bracket [05]	2	2	2	2
	screw [06]	6	6	6	6
	screw [07]	8	12	16	16
	wall plug [08]	8	12	16	16

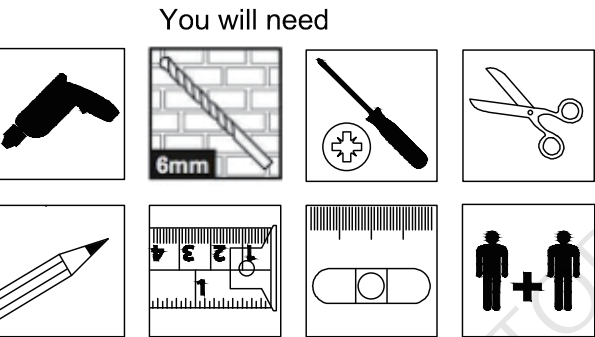


WARNING!


- * Young children can be strangled by loops in pull-cords, chains and tapes, and cords that operate the product.
- * To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck.
- * Move beds, cots and furniture away from window covering cords.
- * Do not tie cords together. Make sure cords do not twist and create a loop.
- * Head rails of internal blinds with pull cords shall not be installed less than 1.5m from the floor
- * Do not use if any part is missing or damaged. The release of small parts from this product could result in choking hazard of children.

01. Fitting brackets


Note : 1) Please ensure the correct wall plugs are used to suit your wall type. Wall fixing kit supplied suit for solids walls.
2) Center bracket [02] will only be supplied in blinds over 85cm. See components for reference.

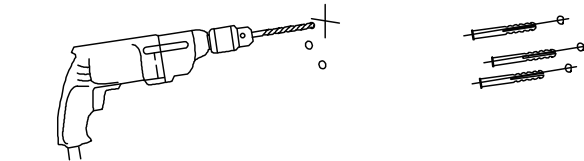


A. Fixed inside window recess

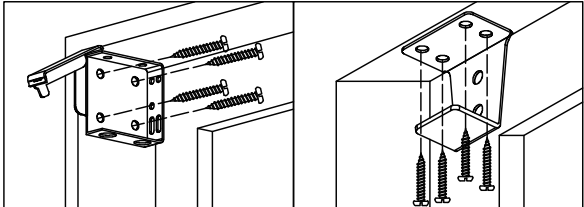


B. Fixed outside window recess

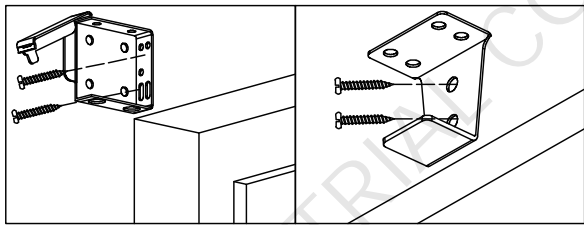

C. Ceiling fixed

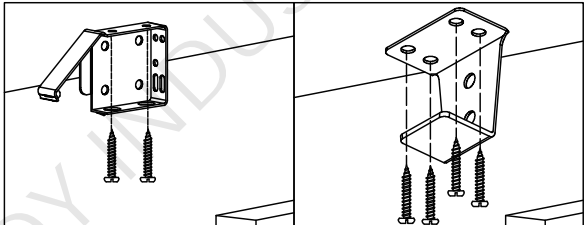


Note: The blind should be positioned centrally within or above the window recess. Use the tape measure and spirit level to ensure all bracket positions are accurate and level.

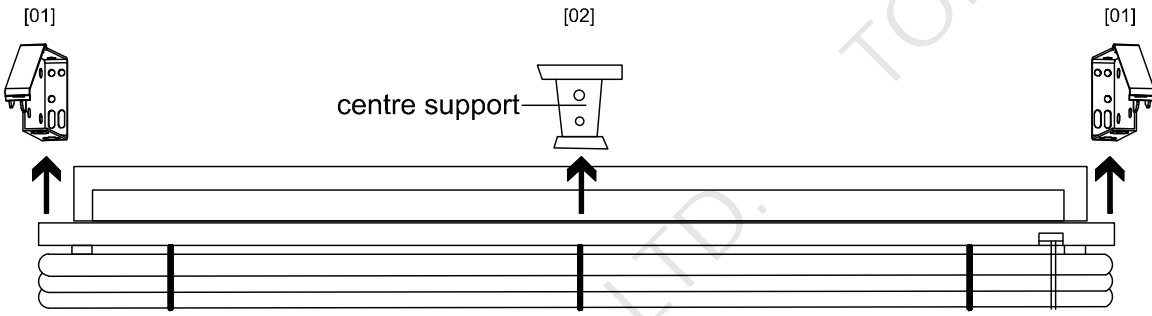


Note: For single support bracket, position centrally. For two support brackets, space evenly between end brackets. Ensure brackets are fitted to the same height horizontally

02. Move cord stoppers


A.Slacken the cord around the safety stoppers allowing them to be moved down the cord.



B.Move cord stoppers 2-4cm above cord consolidator to fully lower your blind.

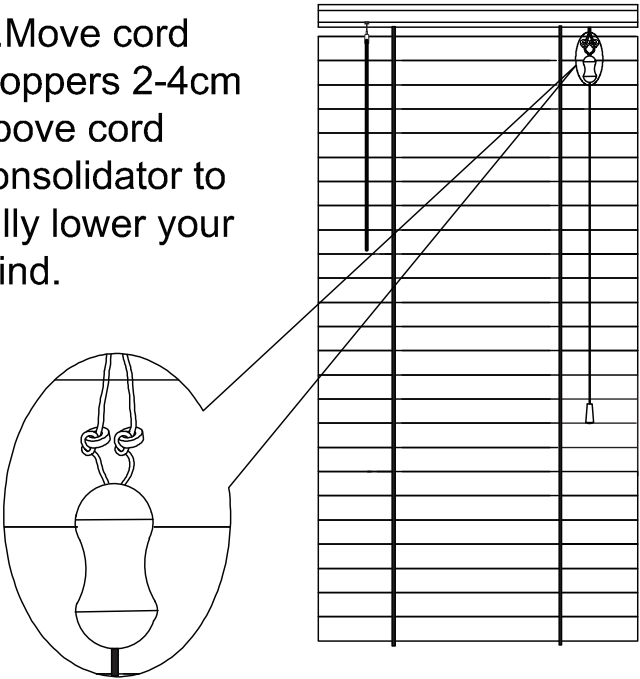


03. Place the Blind into brackets

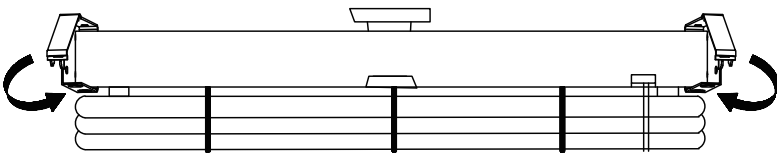

Close cover on both end brackets.

04. Fitting valance with valance clip

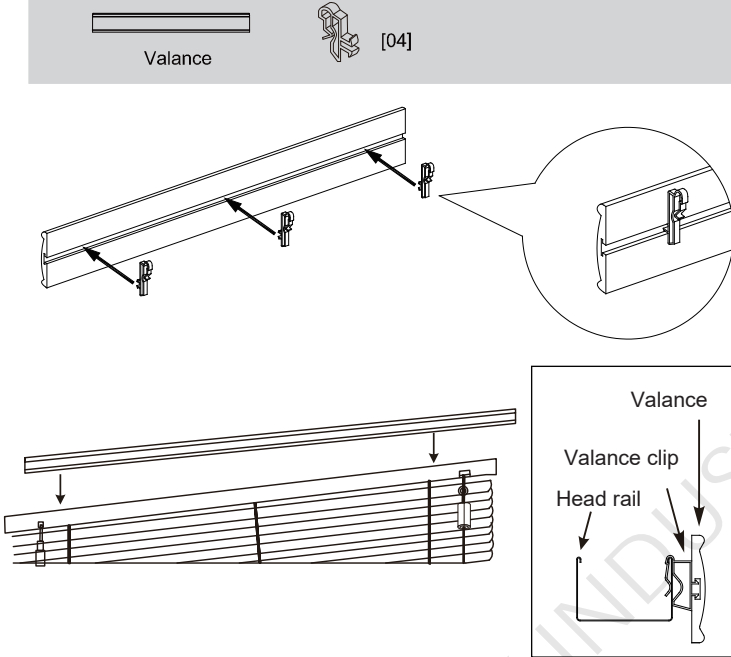


Hook valance clip onto valance groove first then hook onto head rail as above picture shows.


05 . Fitting retaining clip

●Choose suitable method A or B for your blind.

A. Fitting bottom bar retaining clips inside window recess.

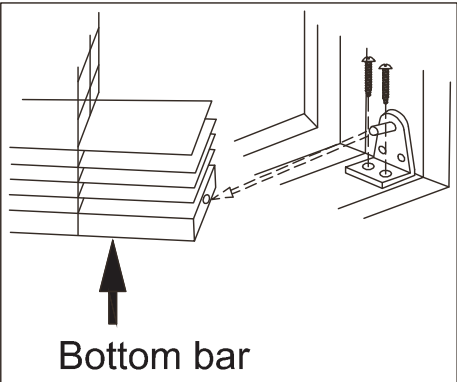


B. Fitting bottom bar retaining clips outside of window recess.

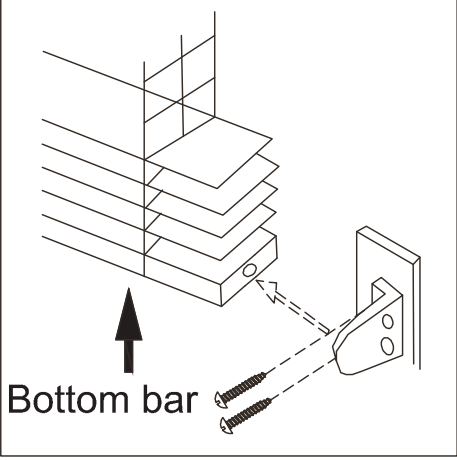

06 . Shorten your blind

Caution: Goods can not be returned after customizing check all size before you cut or modify any parts.

The Height: When the blind is fully lowered, there should be no slats overlapping at the bottom of the blind. If over lapping occurs you can remove slats to allow a custom fit.

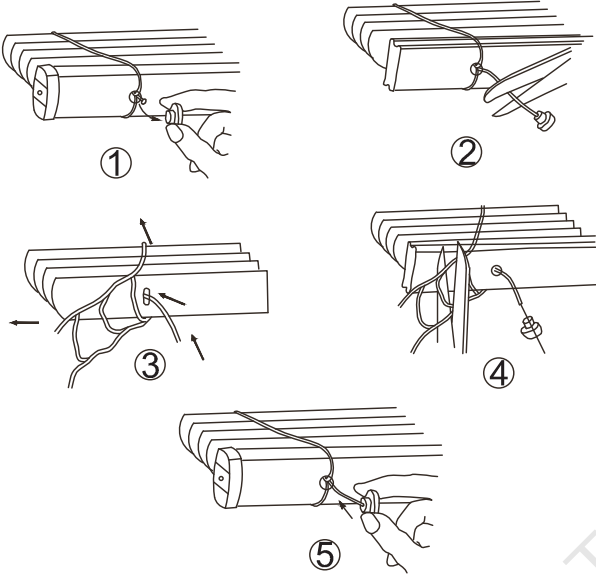

07 . Fitting cleat

WARNING:

Children can strangle if this device is not installed and adjusted. Read carefully the instructions and install accordingly.

Head rails shall not be installed less than 1.5m from the floor.

A safety device is fitted to the cords of this blind, it will open and release of this blind, it will open and release the cords if something becomes caught in the cord loops.

To re-assemble after the cords have been released, or after shortening the cords, re-insert the cords into the device as illustrated fig.01.

Please ensure there is a knot on the end of each individual cord before clipping the device back together.

It is mandatory to use the cleat provided in this pack during the installation of this blind.

The cleat should be adjacent to the blind and not less than 1.5m from the floor.

Test the device if not used regularly and replace the device if it is faulty.


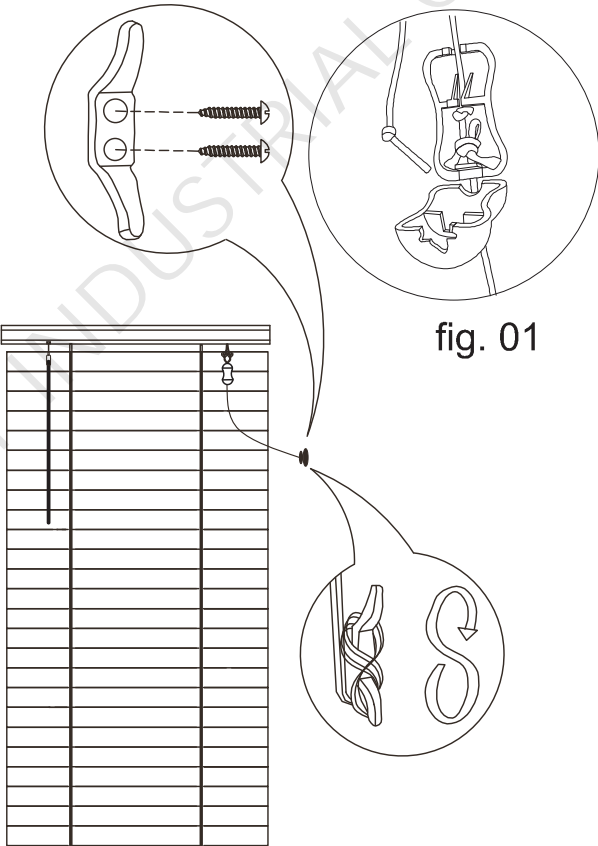



fig. 01

09. Tilt the blind

Blind opened

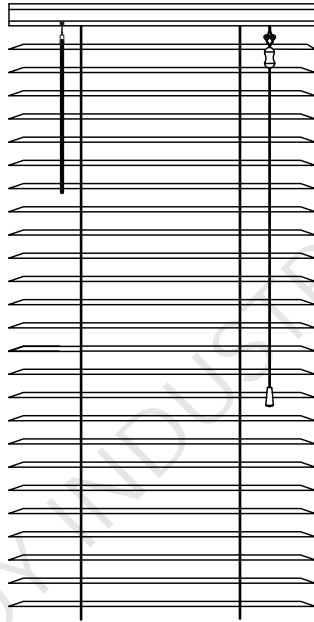


Blind closed

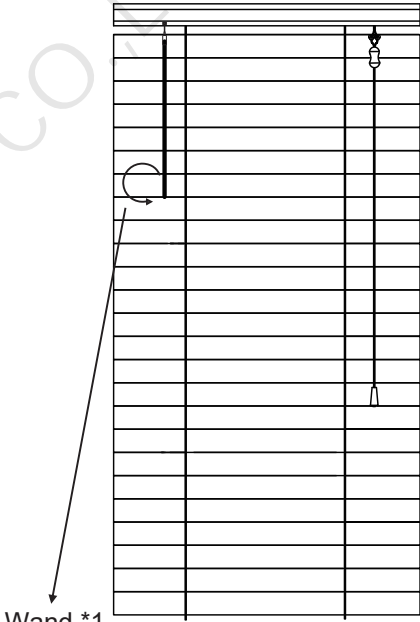


10. Lowering and raising blind

Always tilt the slats to horizontal (open) position before lowering or raising the blind

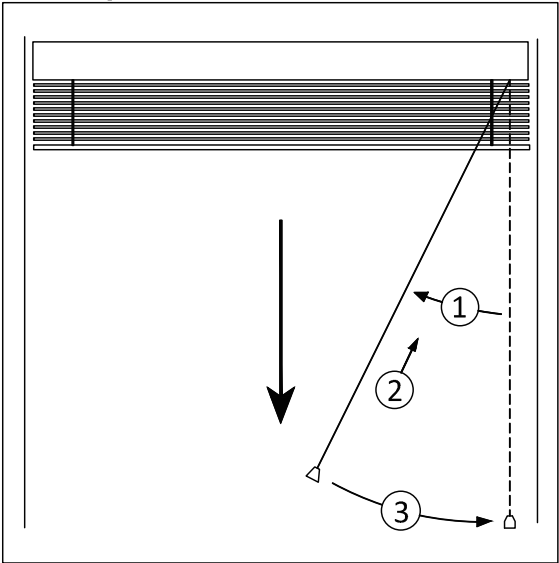

raising the blind

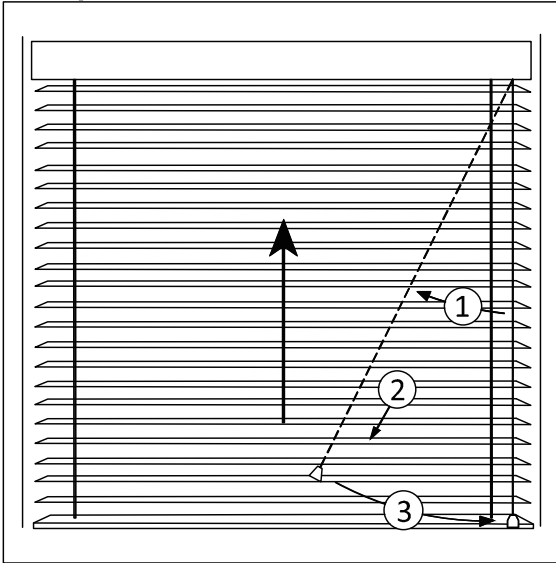

Care and Maintenance

Storage, handling and transportation

When in storage, keep the products in a dry and ventilated place. At least one adult is required for handling and transportation.

Cleaning

As with all surfaces, clean with a damp cloth and mild detergent, do not use bleach or abrasive products.

Fitting

From time to time, check to ensure the screws remain tight. Frequently examine the installation for signs of wear or damage to cords. Do not use if broken and repair is necessary.